

al  
cont  
sub  
cl2  
cont

--6. (amended) Belt according to claim 1, characterised in that the rocking edge of a transverse element is set less than 1 mm below the saddle surface.

sub  
cl2  
cont  
a2

--8. (amended) Transmission provided with a belt according to claim 1, in which the belt operates under lubricated conditions provided by a lubricating oil, characterised in that the lubricating oil has a dynamic viscosity lower or equal to 4 MPa\*s, at a nominal temperature of 100 degrees Celsius.

sub  
cl2  
cont  
a2

--10. (amended) Transmission including a belt according to claim 1, wherein when the belt is operated in a LOW mode of transmission, the friction coefficient between the carrier and an element remains at least virtually constant over a major part of the regular range of primary shaft rotation speeds to be transmitted, preferably up to 4000 RPM, more preferably up to 6000 RPM.--

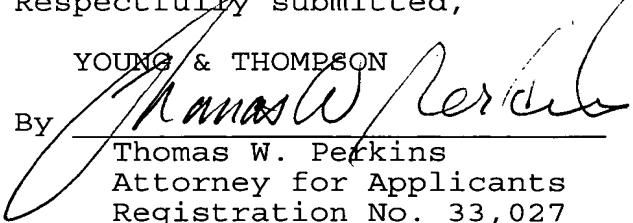
R E M A R K S

Attached hereto is a marked-up version of the changes made to the claims by the current amendment. The attached page is captioned "VERSION WITH MARKINGS TO SHOW CHANGES MADE".

Respectfully submitted,

YOUNG & THOMPSON

By

  
Thomas W. Perkins  
Attorney for Applicants  
Registration No. 33,027  
745 South 23rd Street  
Arlington, VA 22202  
Telephone: 703/521-2297

December 28, 2001